


**DESCRIPTION**

The IR-700D is a receiver distributor used in the TOA's infrared wireless microphone system. It employs 4 receiver mixing inputs and 2 distribution outputs. By using the IR-700D in conjunction with the IR-702T Infrared Wireless Tuner, up to 16 infrared wireless receivers can be connected to the IR-702T.

**SPECIFICATIONS**


Power Source	AC mains, 50/60 Hz (supplied from the included AC adapter)
Power Consumption	25 W or less
Input/Output	4 mixing inputs, 2 distribution outputs
Band-Pass Frequency	3.0 - 6.0 MHz
Gain	0 dB ( $\pm 3$ dB)
Infrared Receiver Input	75 $\Omega$ , BNC jack $\times$ 4 (Infrared wireless receiver's power source: 24 V DC, 800 mA max. in total of 4 terminals)
Distribution Output	75 $\Omega$ , BNC jack
Operating Temperature	-10 $^{\circ}$ C to +50 $^{\circ}$ C (14 $^{\circ}$ F to 122 $^{\circ}$ F)
Operating Humidity	30 % to 85 %RH
Finish	Case: ABS resin, black
Dimensions	210 (W) $\times$ 44 (H) $\times$ 200.9 (D) mm (8.27" $\times$ 1.73" $\times$ 7.91")
Weight	640 g (1.41 lb) (unit only)
Accessory	AC adapter* $\times$ 1, AC Power cord (2 m (6.56 ft)) $\times$ 1, BNC plug-to-BNC plug cord (50 cm (1.64 ft)) $\times$ 1, Rubber foot $\times$ 4
Option	Rack mounting bracket: MB-WT3 MB-WT4 (for mounting with the optional IR-702T together)

\* Not supplied with the IR-700D(KR). For the usable power supply cord and AC adapter, contact your nearest TOA dealer.

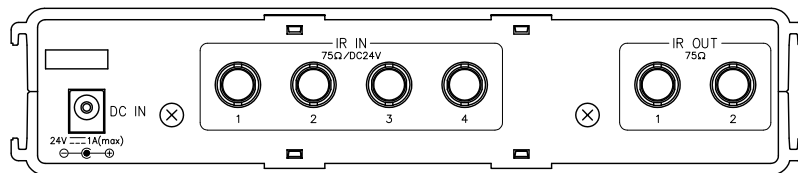**APPEARANCE**


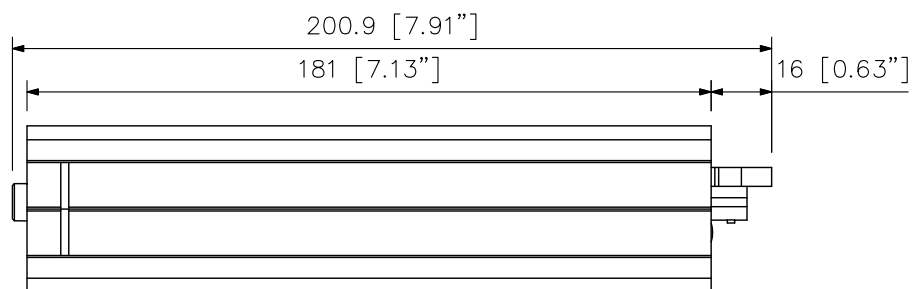
Rear View

210 [8.27"]

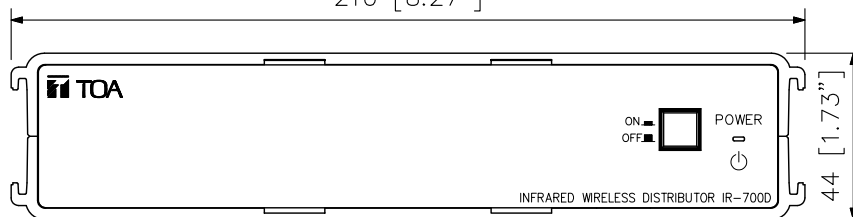

Front View

44 [1.73"]



Side View

UNIT:mm SCALE:1/2