



Camera Selection Guide (Combination Cameras)



Camera Selection Guide (Combination Cameras)

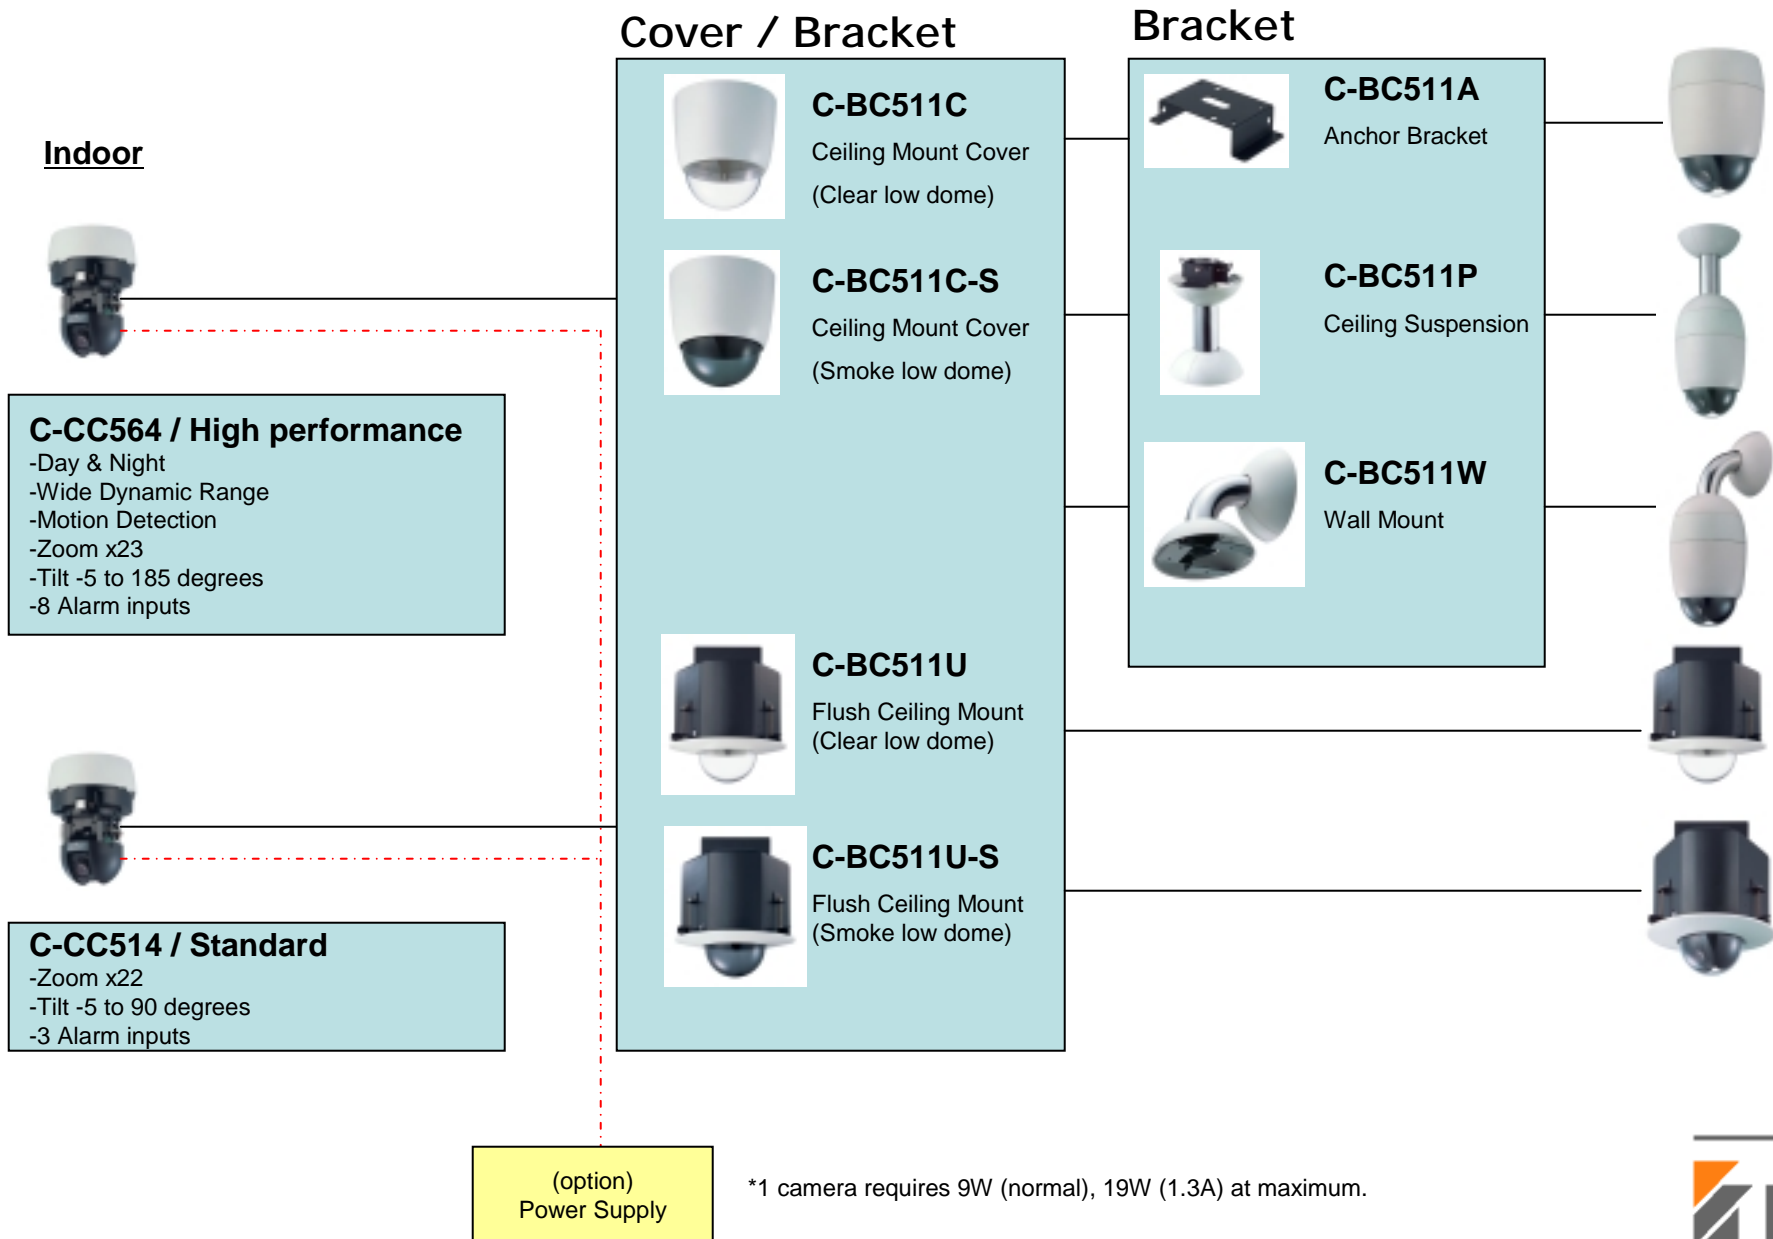

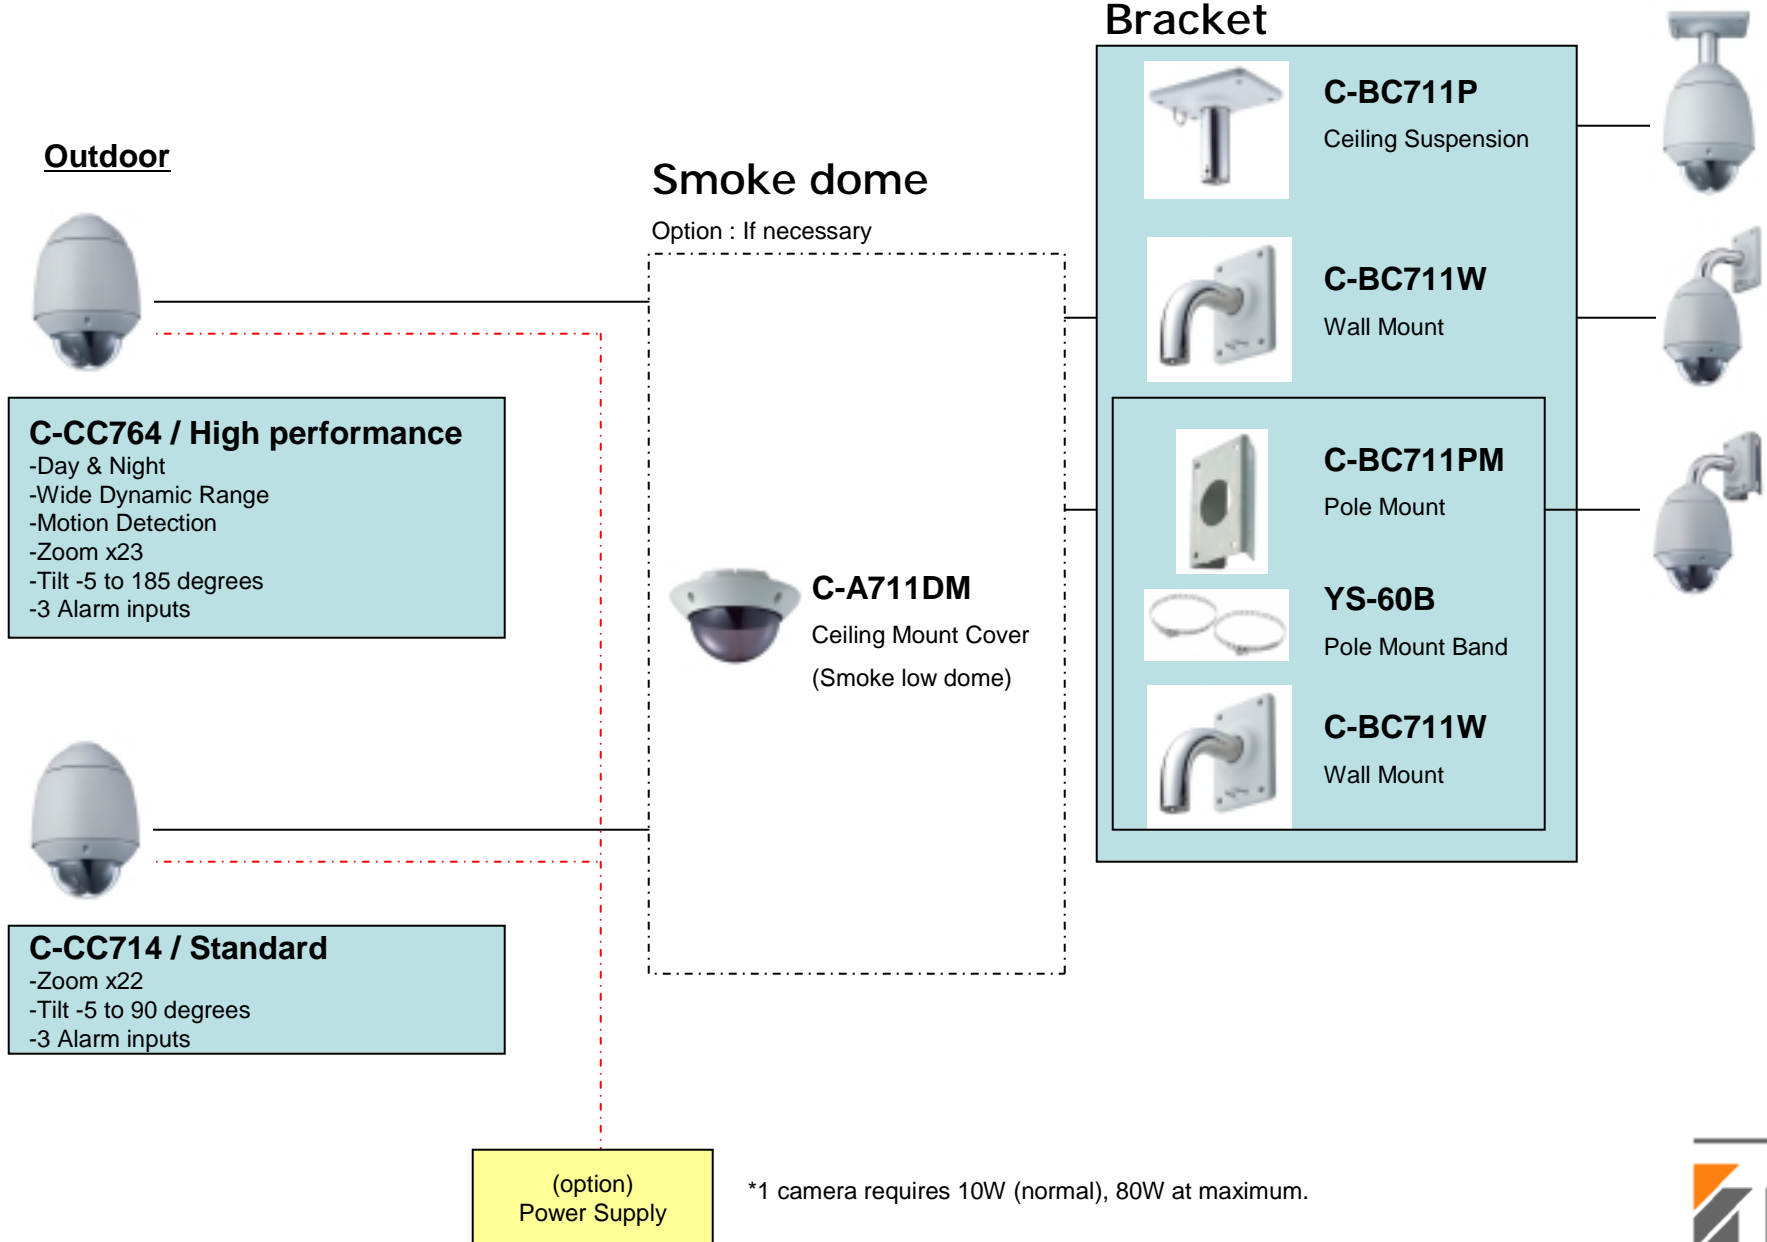

C-CC364 / WDR Camera
 -Day & Night
 -Wide Dynamic Range
 -500TV line resolution



C-CV14-CS (Indoor)
 -480TV line resolution
 -CS Mount (Lens optional)




C-CV14-2 (Indoor)
 -480TV line resolution
 -Focal Length = 2.0-4.0mm



C-CV24-2 (Indoor)
 -480TV line resolution
 -Focal Length = 2.0-4.0mm
 -3-Axes structure



C-CV44-3 (Outdoor)
 -480TV line resolution
 -Focal Length = 3.0-6.0mm
 -3-Axes structure



Q-CV24VP-3 / Q-CV24VP-4 (Vandal-resistant Camera)
 -480TV line resolution
 -Focal Length = 2.8-5.8mm(Q-CV24VP-3), 4-9mm(Q-CV24VP-4)
 -3-Axes structure

Lens

- 13VG2812AS / Vari-focal 2.8-12mm
- 13VG308AS / Vari-focal 3-8mm
- 13VG550 / Vari-focal 5-50mm
- 13VG20100AS / Vari-focal 20-100mm
- 13VG2811ASIR / Vari-focal 2.8-12mm*
- 13VG308ASIR / Vari-focal 3-8mm*
- 13VG1040ASIR / Vari-focal 10-40mm*
- 13FG22IR / Fixed 2.2mm*
- 13FG28IR / Fixed 2.8mm*
- 13FG04IR / Fixed 4mm*
- 13FG06IR / Fixed 6mm*
- 13FG08IR / Fixed 8mm*





*IR lens are effectively used for C-CC364

(option)
 Power Supply

*1x C-CC364 requires 4W.
 *1x CV camera requires 2W.

Bracket

-  **C-BC11 / Ceiling Mount**
(Length = 12-18")
-  **C-BC21 Wall/Ceiling Mount**
-  **C-BC31 Wall/Ceiling Mount**
-  **C-BC41 / Ceiling Mount**
(Length = 2.0-3.3ft)

-  **C-BC20U / Ceiling Mount**

*Mounting Bracket included

*Mounting Bracket included

Camera Selection Guide (Fixed Cameras)



Camera Selection Guide (Others)

