

A-2240 CU

MIXER AMPLIFIER



Multi-purpose, multi-function mixer/power amplifiers specifically designed for maximum versatility and cost-effective high-performance are ideal units for any PA requirement in locations such as schools and offices and other intermediate size environments. A choice of different power outputs are offered as well as functions such as paging and dual zone coverage.

Key features


- Cost effective and durable mixer power amplifier
- User friendly front panel allows easy operation
- 2 electronically balanced microphone inputs, 2 AUX inputs and recording output.
- Phantom power at MIC 1
- Wide tone-control adjustment range of ± 10 dB for both bass and treble
- 70V / 25V line or 4Ω speaker outputs

Specifications


* 0 dB = 1 V

Power Source	120 V AC
Rated Output	240 W
Power Consumption	238 W (EN60065), 520 W (AC operation at rated output)
Frequency Response	50 - 20,000 Hz (± 3 dB)
Distortion	1% or less at 1 kHz, 1/3 rated power
Signal to Noise Ratio	60 dB or more
Input	MIC 1, 2: -60 dB*, 600 Ω , balanced, M3.5 screw terminal, distance between barriers: 8.3 mm (0.33") TEL: -10 dB*, 10 k Ω , balanced, M3.5 screw terminal, distance between barriers: 8.3 mm (0.33") AUX 1, 2: -20 dB*, 10 k Ω , unbalanced, RCA pin jack
Output	Speaker out: Balanced (floating), M3.5 screw terminal, distance between barriers: 8.3 mm (0.33") High impedance: 21 Ω (70 V), 2.6 Ω (25 V) Low impedance: 4 Ω (31 V) Rec out: 0 dB*, 600 Ω , unbalanced, RCA pin jack
Phantom Power	DC +21 V (MIC 1)
Tone Control	Bass: ± 10 dB at 100 Hz Treble: ± 10 dB at 10 kHz
Muting	MIC 1, MIC 2, and TEL have a priority function to attenuate AUX1 and AUX 2 input signals by 30 dB. (Sensitivity level for MIC 1, MIC 2, and TEL adjustable) Priority level among MIC 1, MIC 2, and TEL is the same.
Finish	Panel: ABS resin, black Case: Steel plate, black
Dimensions	420 (W) x 100.9 (H) x 360.3 (D) mm (16.54" x 3.97" x 14.19")
Weight	15.5 kg (34.17 lb)

Product rear image

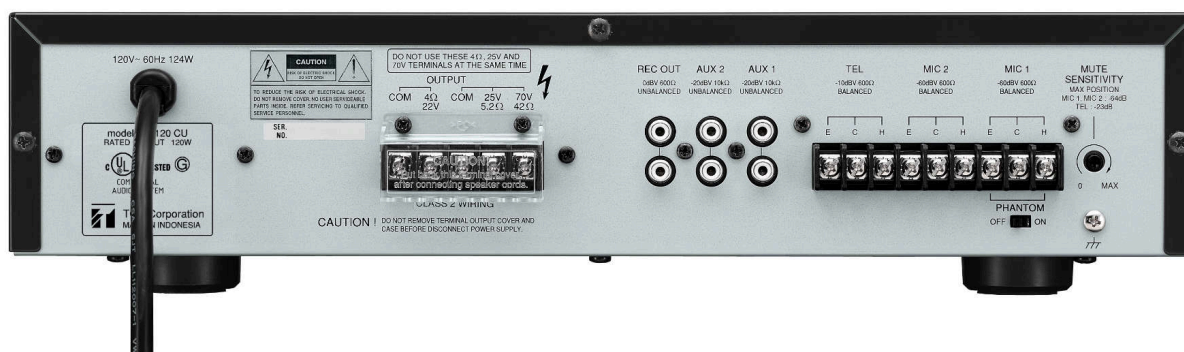

Dimensions

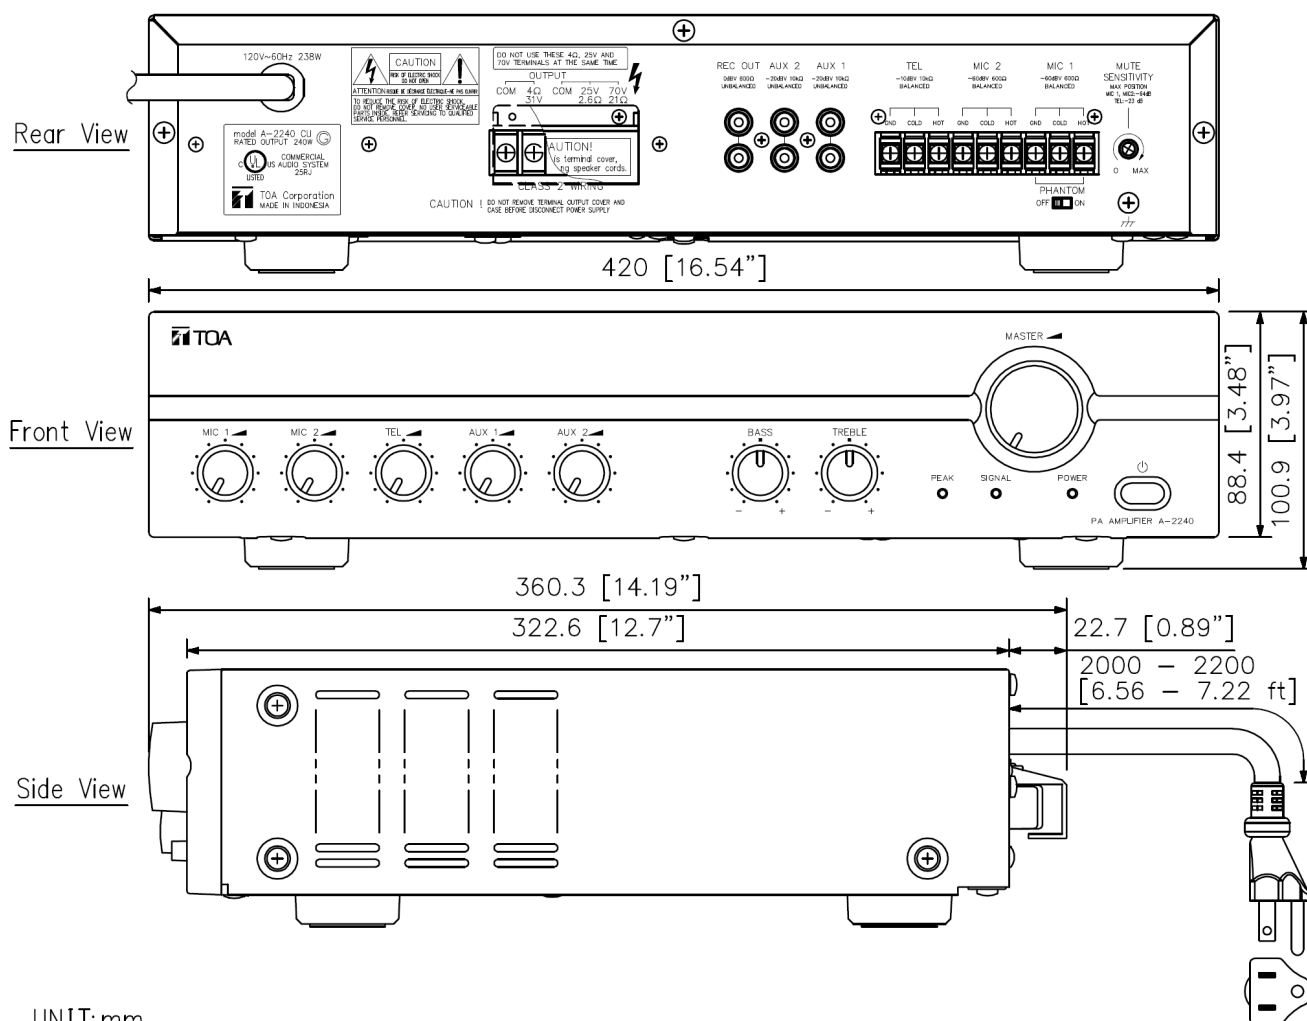

UNIT:mm

A&E specifications

The mixer power amplifier shall be ideal for a wide variety of installed sound applications such as paging and background music (BGM) distribution. The mixer power amplifier shall have the ability to accommodate up to five audio signals in total. The amplifier shall control and mix up to two electronically balanced (screw terminal) MIC inputs, one balanced (screw terminal) TEL input, up to two unbalanced (RCA pin jack) AUX inputs, and deliver an audio output of 240W. The MIC input impedance shall be 600 ohm, the TEL input impedance shall be 10k ohms, and the AUX impedance shall be 10k ohms. Specifications shall be equal to the following: frequency response: 50 to 20k Hz (+/- 3 dB). Distortion: Less than 1% THD at 1 kHz, 1/3 rated power. It shall be capable of operation from a 120 V AC 60 Hz line. Power consumption shall be 238 w. Phantom power for MIC1 shall be DC +21V. The S/N ratio shall be over 60 dB. Tone controls shall be +/- 10 dB at 100Hz for bass and +/- 10 dB at 10k Hz for treble. The mixer power amplifier shall include 25 V, 70 V, or 4 ohm transformer-isolated outputs with screw terminal type connections and a protective cover plate, and AUX output with dual-RCA jacks for recording or connection to an external booster amplifier. The amplifier shall incorporate an auto-mute function with MIC1, MIC2, and TEL inputs that override BGM channels AUX 1 and AUX 2 with -30 dB attenuation, for voice activated paging at an adjustable threshold level (0 to 64 dB for MIC and MIC 2, 0 to -23 dB for TEL). The mixer amplifier front panel shall include a master volume control, MIC/TEL and AUX volume controls, Bass/Treble tone controls and Signal, Peak, and Power LEDs. Dimensions shall be 16.5" (W) x 4.0" (H) x 14.2" (D). Net weight shall be 29.10 lb. Front panel and material shall be black ABS resin and case finish and material shall be black steel plate.

The mixer power amplifier shall be TOA model A-2240