

DESCRIPTION


The TOA WA-1822C is a portable cassette meeting amplifier rated at 20 W output. It has an internal cassette deck and can accept up to two optional wireless tuner modules (WTU-4800, WTU-3800) of UHF and VHF high band.

SPECIFICATIONS

* 0 dB = 1 V

Power Source	120 V AC, 50/60 Hz Dry cells—8 pcs. (R20P or D size)
Power Consumption	AC: 45 W (rated output)
Rated Output	AC: 20 W (Max. 40 W with EXT SP.), DC: 8 W
Battery Life	Dry cell battery: Approx. 6 hours
Frequency Response	70 Hz—10 kHz (deviation 3 dB)
Distortion	Under 10 % (rated output)
Input	Wired mic: -48 dB*, 600 Ω AUX: -20 dB*, 10 kΩ
Output	External speaker: 8 - 16 Ω/over 20 W of rated input "Internal speaker and external speaker" or "external speaker only" (selectable) Line/Rec: -10 dB*, 1 kΩ
S/N Ratio	Over 70 dB (rated output)
Antenna	Rod antenna
Cassette Deck	Reproduction system: Auto-reverse Track system: 2-track/1 channel (monaural) Usable tape: Normal tape Recording method: AC bias Erasing method: AC erasure Tape speed: 4.8 cm/s Wow and flutter: 0.2 % WRMS Fast forward/rewind time: Approx. 130 s (C-60 tape)
Internal Speaker	20 cm full range speaker + tweeter
Operation Temperature	AC: -10 °C to +50 °C, DC: 0 °C to +40 °C
Finish	ABS resin, light gray
Dimensions	298 (W) × 460 (H) × 200 (D) mm
Weight	6.7 kg
Accessory	Power cord (2 m) ...1, Dust cover ...1, Screw driver ...1

APPEARANCE

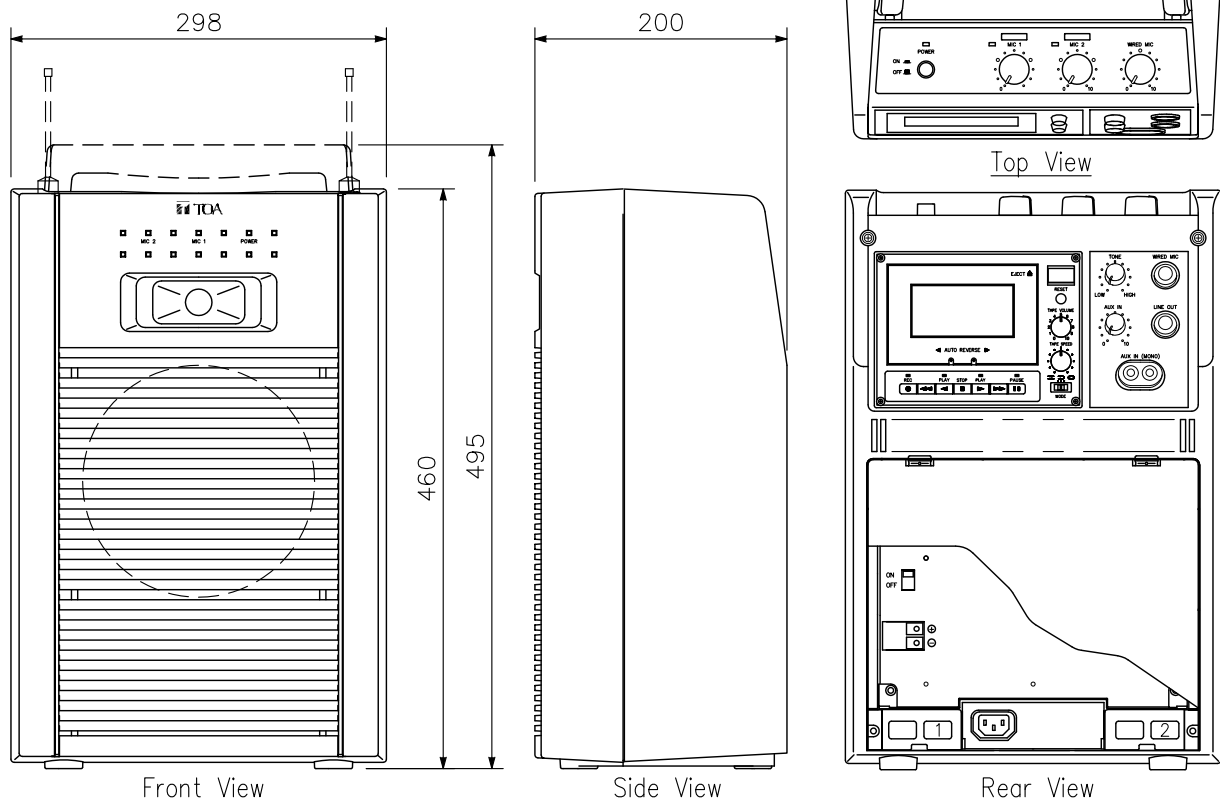

UNIT:mm SCALE:1/6