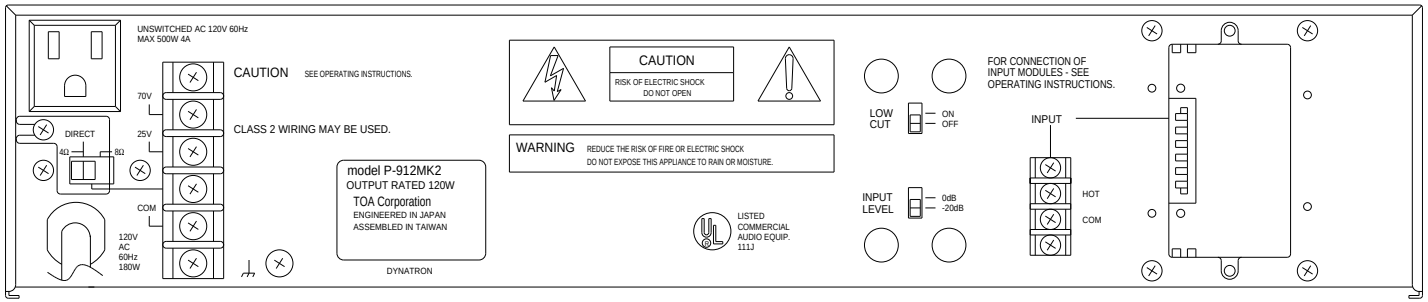
UNSWITCHED AC 120V 60Hz
MAX 500W 4A
CAUTION
SEE OPERATING INSTRUCTIONS.
70V
25V
COM
CLASS 2 WIRING MAY BE USED.
DIRECT
4Ω
8Ω
120V
AC
60Hz
180W
model P-912MK2
OUTPUT RATED 120W
TOA Corporation
ENGINEERED IN JAPAN
ASSEMBLED IN TAIWAN
DYNATRON
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
WARNING
REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK
DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.
LISTED
COMMERCIAL
AUDIO EQUIP.
111J
LOW
CUT
ON
OFF
INPUT
LEVEL
0dB
-20dB
FOR CONNECTION OF
INPUT MODULES - SEE
OPERATING INSTRUCTIONS.
INPUT
HOT
COM

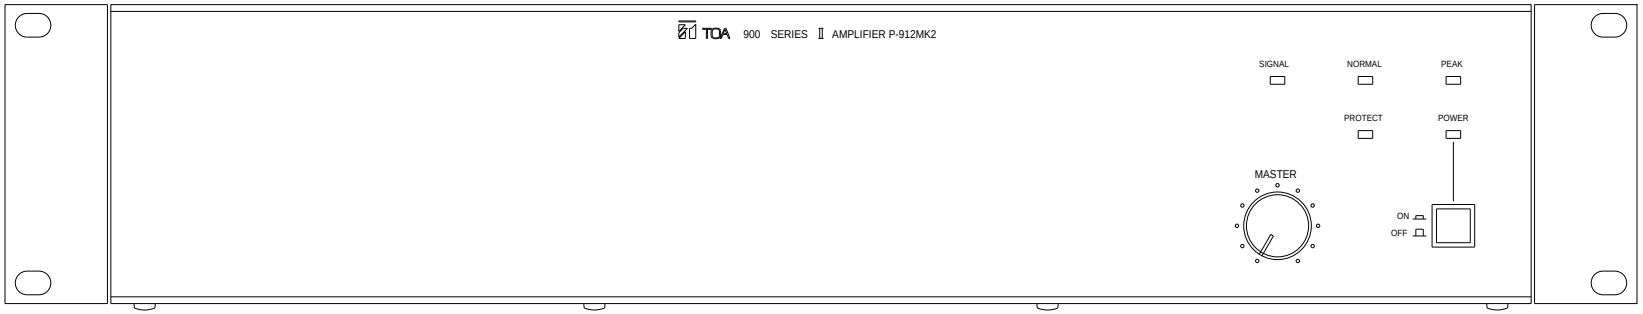
TOA 900 SERIES Ⅱ AMPLIFIER P-912MK2
SIGNAL
NORMAL
PEAK
PROTECT
POWER
MASTER
ON
OFF