

## DESCRIPTION


The VS-900AF enables Conference, External Amplifier Paging, and External Source Distribution functions. The Audio Function Card has 1 conference link (maximum 4 stations), 1 audio output and 16 control outputs for external amplifier paging, and 1 audio input and 4 control inputs for external source distribution.

## SPECIFICATIONS

\* 0 dB = 1 V

Power Source	5 V DC, 15 V DC, 24 V DC (supplied from the main frame)
Current Consumption	170 mA (5 V DC), 50 mA (15 V DC), 30 mA (24 V DC)
Paging Output	Audio signal: 1 signal, 0 dB*, unbalanced Control signal: 16 signals, open collector signal, withstand voltage: 24 V DC, control current: 20 mA
External Source Distribution	Audio input: 1 input, 0 dB*, unbalanced Control input: 4 inputs, no-voltage make contact, open voltage: 24 V DC, short circuit current: 20 mA
Conference Link	1 link (up to 4-party conference)
Connection Terminal	Main frame connection side: DIN connector (64-pin, male) External interface side: Audio output 2-pin Control output 2-pin × 16 Audio input 2-pin Control input 2-pin × 4
Operating Temperature	0°C to +40°C
Weight	230 g
Accessory	Connector (2-pin) .....2, Connector (4-pin) .....10

## APPEARANCE

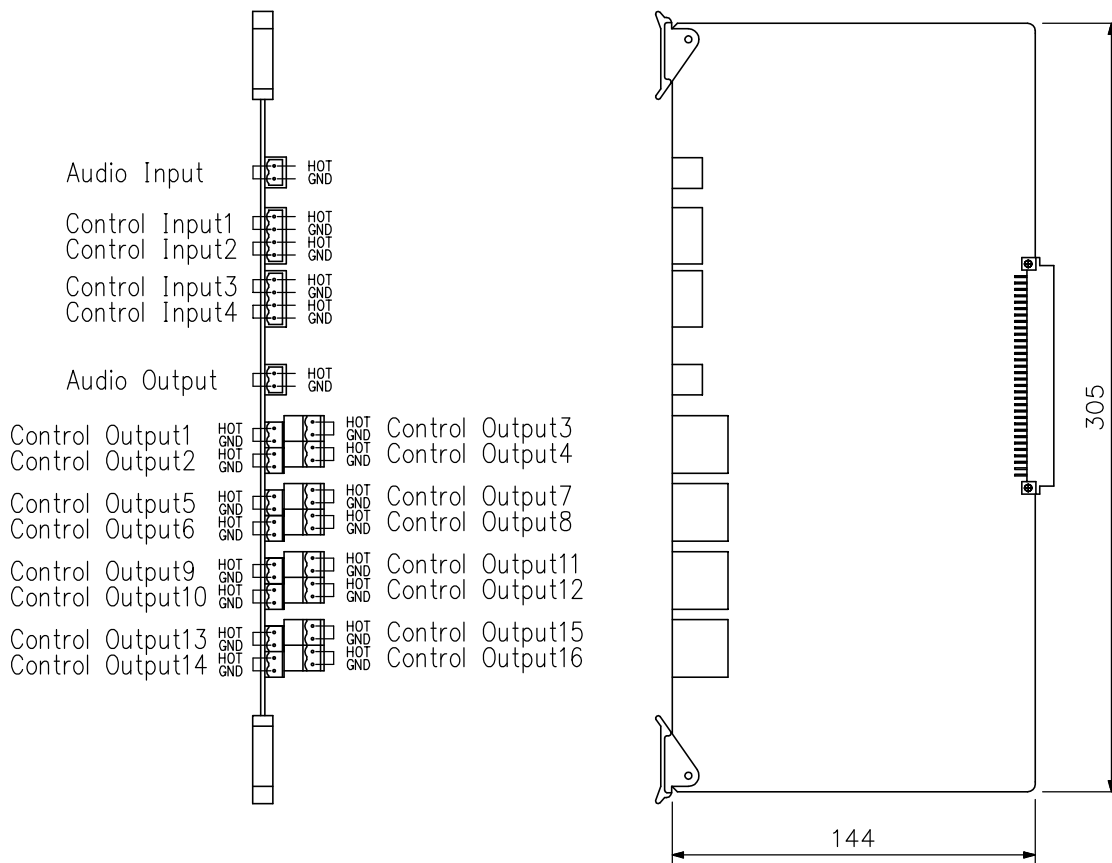

UNIT:mm SCALE:1/3