

DESCRIPTION


The VS-900C0 is used for outside line connection. Up to 2 outside lines can be connected per card, and an external recording device can be connected to each line.

SPECIFICATIONS

\* 0 dB = 1 V

Power Source	5 V DC, 15 V DC, 24 V DC (supplied from the main frame)
Current Consumption	300 mA (5 V DC), 50 mA (15 V DC), 50 mA (24 V DC)
Number of Lines	2 lines
Conversation Recording Output	Audio signal: 0 dB*, unbalanced Control signal: Open collector signal, withstand voltage: 24 V DC, control current: 20 mA
Selective Signal Type	DTMF signal
Signal Format	Loop start and Ground start compatible
Main Functions	DTMF dial signal transmission function, DTMF signal detection function, call signal (receiving) detection
Connection Terminal	Main frame connection side: DIN connector (64-pin, male) C/O line connection side: 4-pin × 2 Recording audio/control output: 4-pin × 2
Operating Temperature	0°C to +40°C
Weight	380 g
Accessory	Connector (4-pin) .....4

APPEARANCE

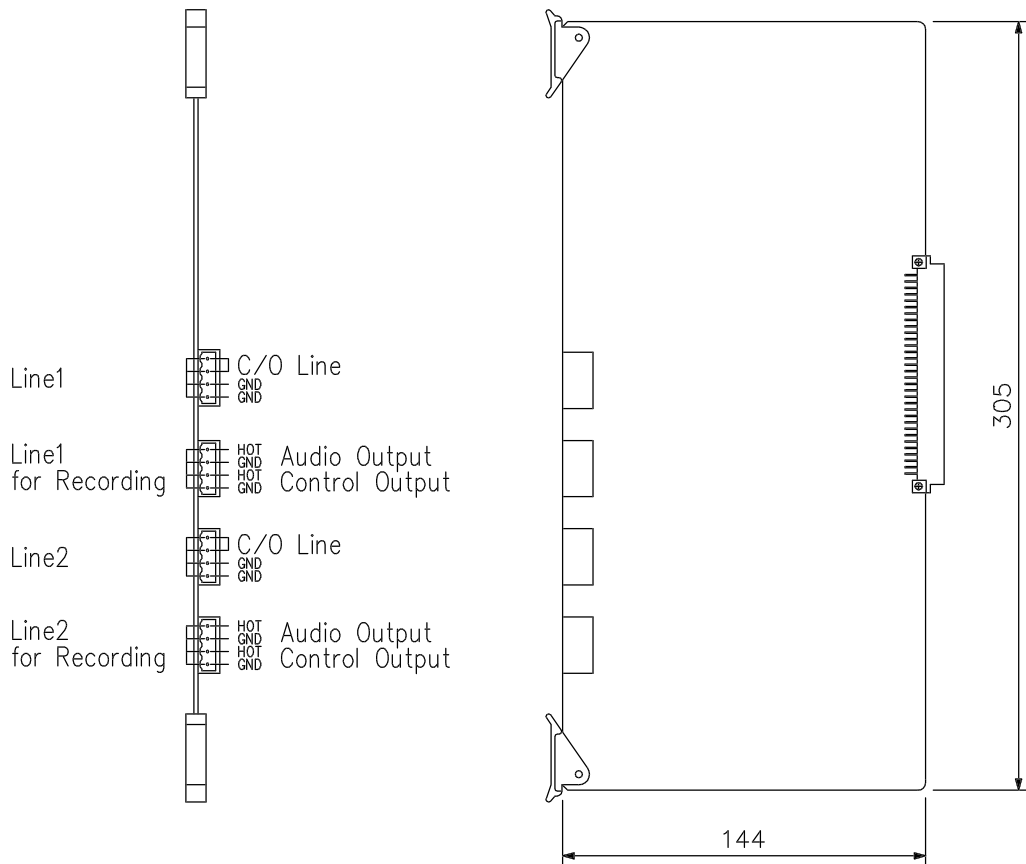

UNIT:mm SCALE:1/3