

■DESCRIPTION

The VS-900TI is used to interconnect multiple exchange. The Tie-Line Interface Card can connect up to 4 links made up by 1 pair of data lines and 2 pair of audio lines.

■SPECIFICATIONS


* 0 dB = 0.775 V

| | |
|-----------------------|--|
| Power Source | 5 V DC, 15 V DC (supplied from the main frame) |
| Current Consumption | 100 mA (5 V DC), 50 mA (15 V DC) |
| Number of Audio Links | 4 links |
| Connection Format | Multidrop system |
| Transmitting System | Data: RS-485 Voice: Base band |
| Input/Output Level | Data: In compliance with RS-485 Standard Voice: 0 dB*, balanced |
| Other | Exchange number setting function |
| Connection Terminal | Main frame connection side: DIN connector (64-pin, male) Tie-line interface side: 4-pin × 4 (Voice line) 4-pin × 1 (Data line) |
| Operating Temperature | 0°C to +40°C |
| Weight | 320 g |
| Accessory | Connector (4-pin)5 |

Maximum cable distance

| | | | |
|------------|------------------|------------------|------------------|
| Cable Type | AWG24 (ø0.52 mm) | AWG22 (ø0.65 mm) | AWG20 (ø0.82 mm) |
| Distance | 0.6 km | 1 km | 1.5 km |

■APPEARANCE

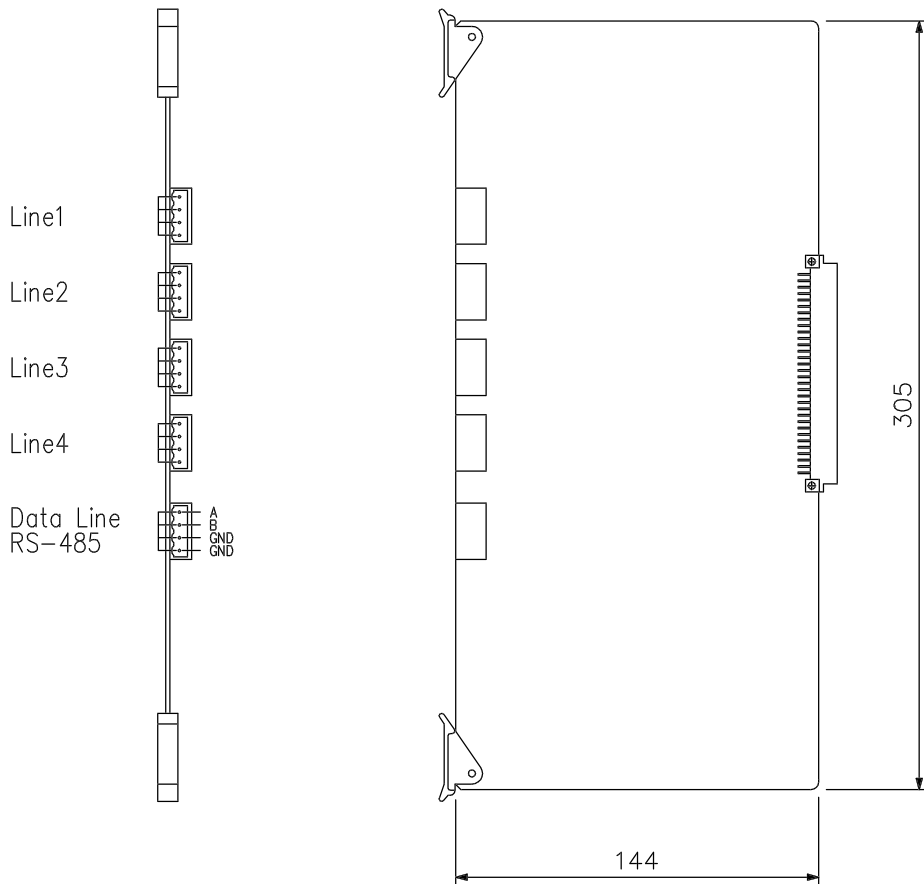

UNIT:mm SCALE:1/3