TOA


LOUDSPEAKER

F-505G

■SPECIFICATIONS

Enclosure Type	Vented (bass reflex) type
Speakers	Low Frequency: 20 cm woofer High Frequency: CD horn plus compression driver
Power Handling Capacity	Continuous pink noise: 80 W RMS of band limited pink noise (40 Hz – 20 kHz, 24 hours) Continuous program : 240 W Instantaneous peak : 800 W
Nominal Impedance	8 Ω
Sensitivity	93 dB (1 W, 1 m, Band-limited pink noise, 230 Hz – 2.5 kHz)
Frequency Response	70 Hz – 20 kHz
Box tuning frequency	70 Hz
Crossover frequency	3 kHz
Crossover Slope	12 dB/Oct. (Woofer) 18 dB/Oct. (Tweeter)
Input Terminals	Two 1/4" phone jacks and screw type, both for full-range
Enclosure materials	Low-foam polypropylene
Finish	Gray
Dimensions	452 (W) × 282 (H) × 232 (D) mm (17.79" × 11.10" × 9.13")
Weight	7.5 kg (16.53 lb)
Option	Wall mounting bracket: HY-501B, HY-601B, YS-500, YS-60 Ceiling mount bracket: HY-30 Speaker stand: ST-34B

■APPEARANCE

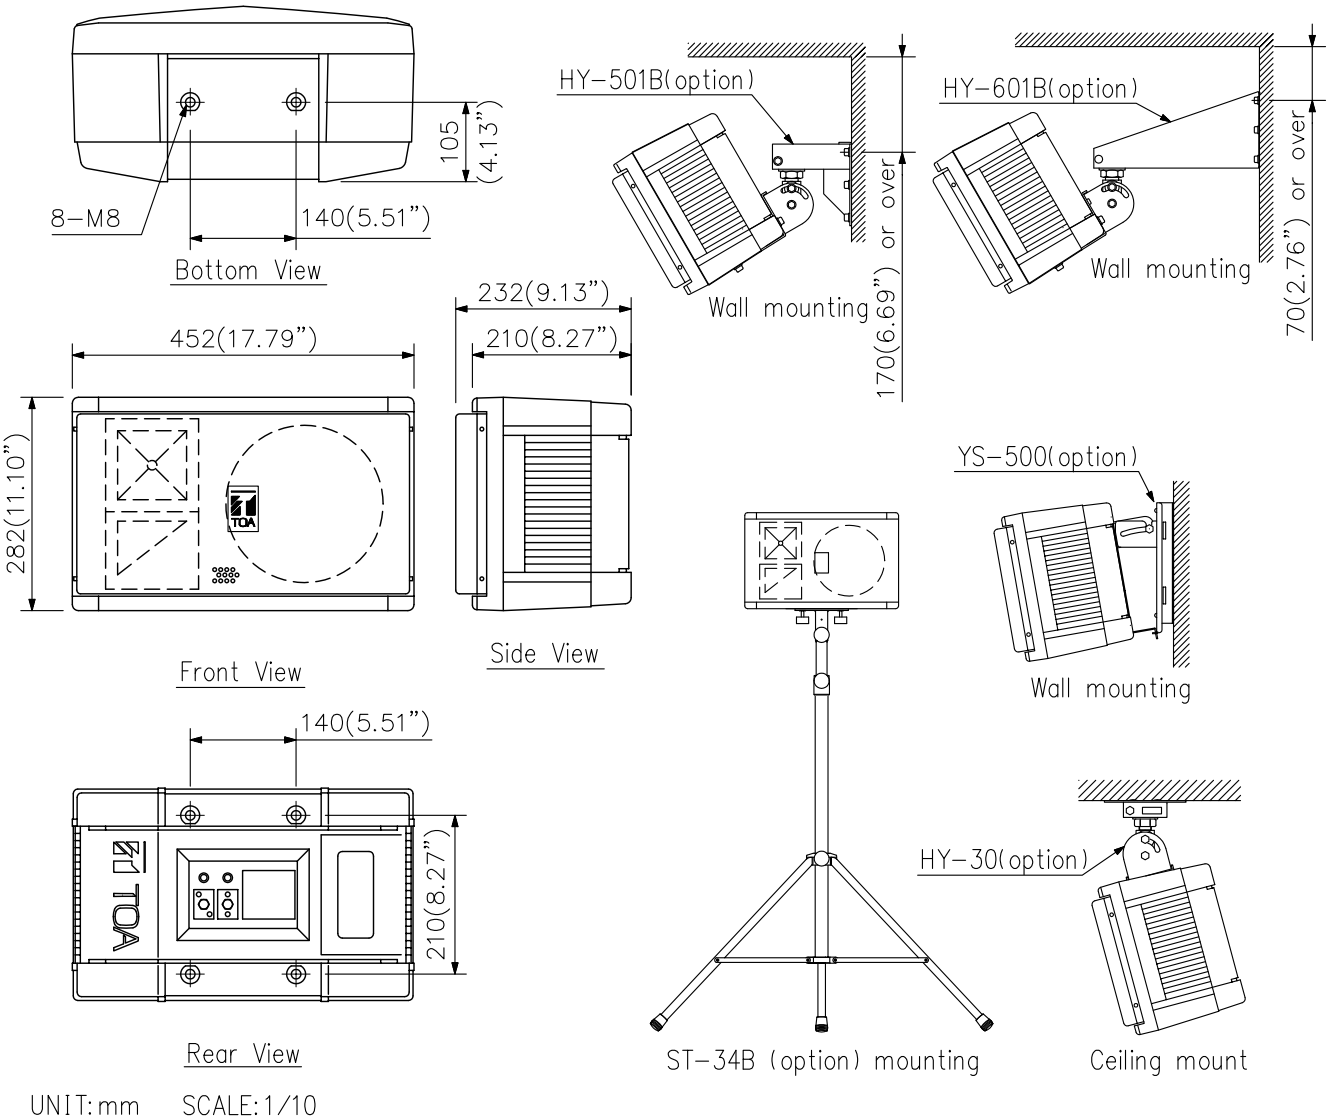

UNIT: mm SCALE: 1/10