TOA


LOUDSPEAKER

F-605W

■SPECIFICATIONS

Enclosure Type	Vented (bass reflex) type
Speakers	Low frequency: 30 cm woofer High frequency: CD horn plus compression driver
Power Handling Capacity	Continuous pink noise: 120 W RMS of band-limited pink noise (40 Hz – 20 kHz, 24 hours) Continuous program: 360 W Instantaneous peak: 1.2 kW
Nominal Impedance	8 Ω
Sensitivity	98 dB (1 W, 1 m, Band-limited pink noise, 230 Hz – 2.5 kHz)
Frequency Response	65 Hz – 20 kHz
Box Tuning Frequency	65 Hz
Crossover Frequency	2 kHz
Crossover Slope	18 dB/Oct. (woofer) 12 dB/Oct. (tweeter)
High Frequency Level Control	+1.5 – –15 dB (with an "OFF" position)
Input Terminals	Two 1/4" phone jacks and screw type, both for full-range
Enclosure Materials	Low-foam polypropylene
Finish	Ivory
Dimensions	552 (W) × 392 (H) × 270 (D) mm (21.73" × 15.43" × 10.63")
Weight	17 kg (37.48 lb)
Option	Wall mounting bracket: HY-501W, HY-601W, YS-600 Ceiling mount bracket: HY-30W Speaker stand: ST-34B

■APPEARANCE

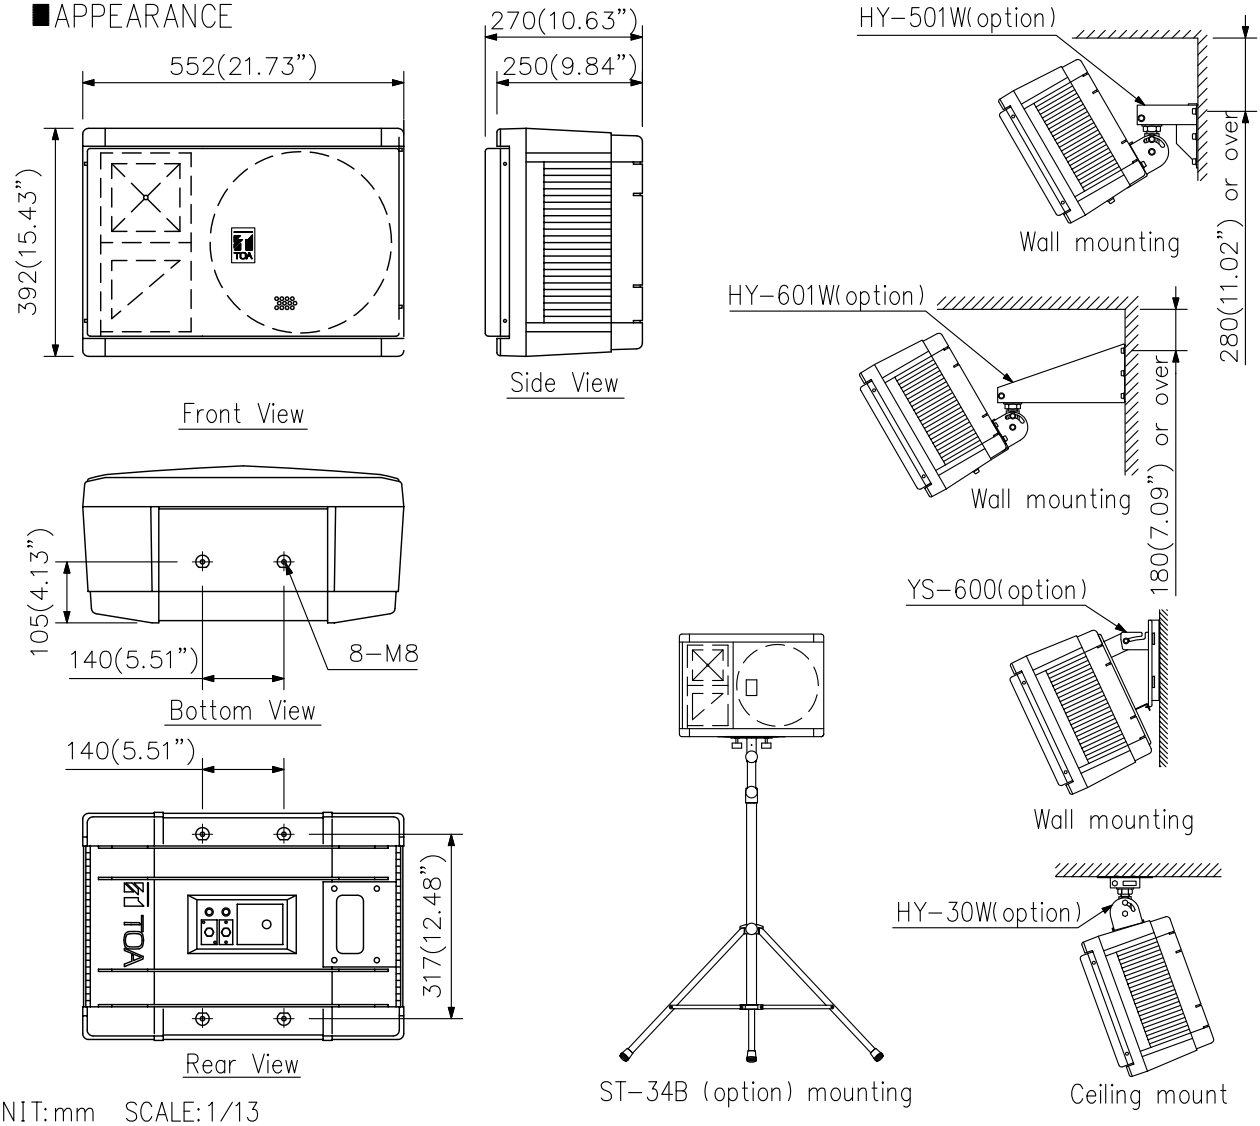

UNIT: mm SCALE: 1/13