

DH-502-AS

STRAIGHT HORN




The DH-502 features a long horn which permits sounds to easily pass through and is ideal for providing public address information. It is designed to be used in conjunction with 2 driver units, and has an internal bird protector net to prevent insects and birds from getting into the unit.

Key features

Specifications

Compatible Driver	TU-631 (M), TU-632 (M), TU-651 (M), TU-652 (M), TU-660 (M)
Driver Coupling	1 - 3/8 18 threads (inch screw)
Sound Pressure Level	110 dB (1 W, 1 m) (when operated with drivers)
Frequency Response	200 Hz - 6 kHz (when the TU-631 (M) or TU-632 (M) or TU-651 (M) or TU-652 (M) unit is used)200 Hz - 8 kHz (when the TU-660 (M) unit is used)
Variable Installation Angle	Hor.: + 15°, -15° ; Ver.: + 15°, -15° (when locally procured mounting bracket is used)
Dust/Water Protection	IP65 for Drivers (when be installed to Horn)
Finish	Bell, Horn B and Y-Shaped Adapter : Aluminum, Grey, Powder coatingMounting Bracket : Stainless Steel, Natural
Dimensions	ø 500 X 846 (D) mm
Weight	5.7 kg
Included Accessories	BH Screw M5x25 SUS 3-SEM ... 4 pcs, Rubber Gasket ...1 pcs

Dimensions

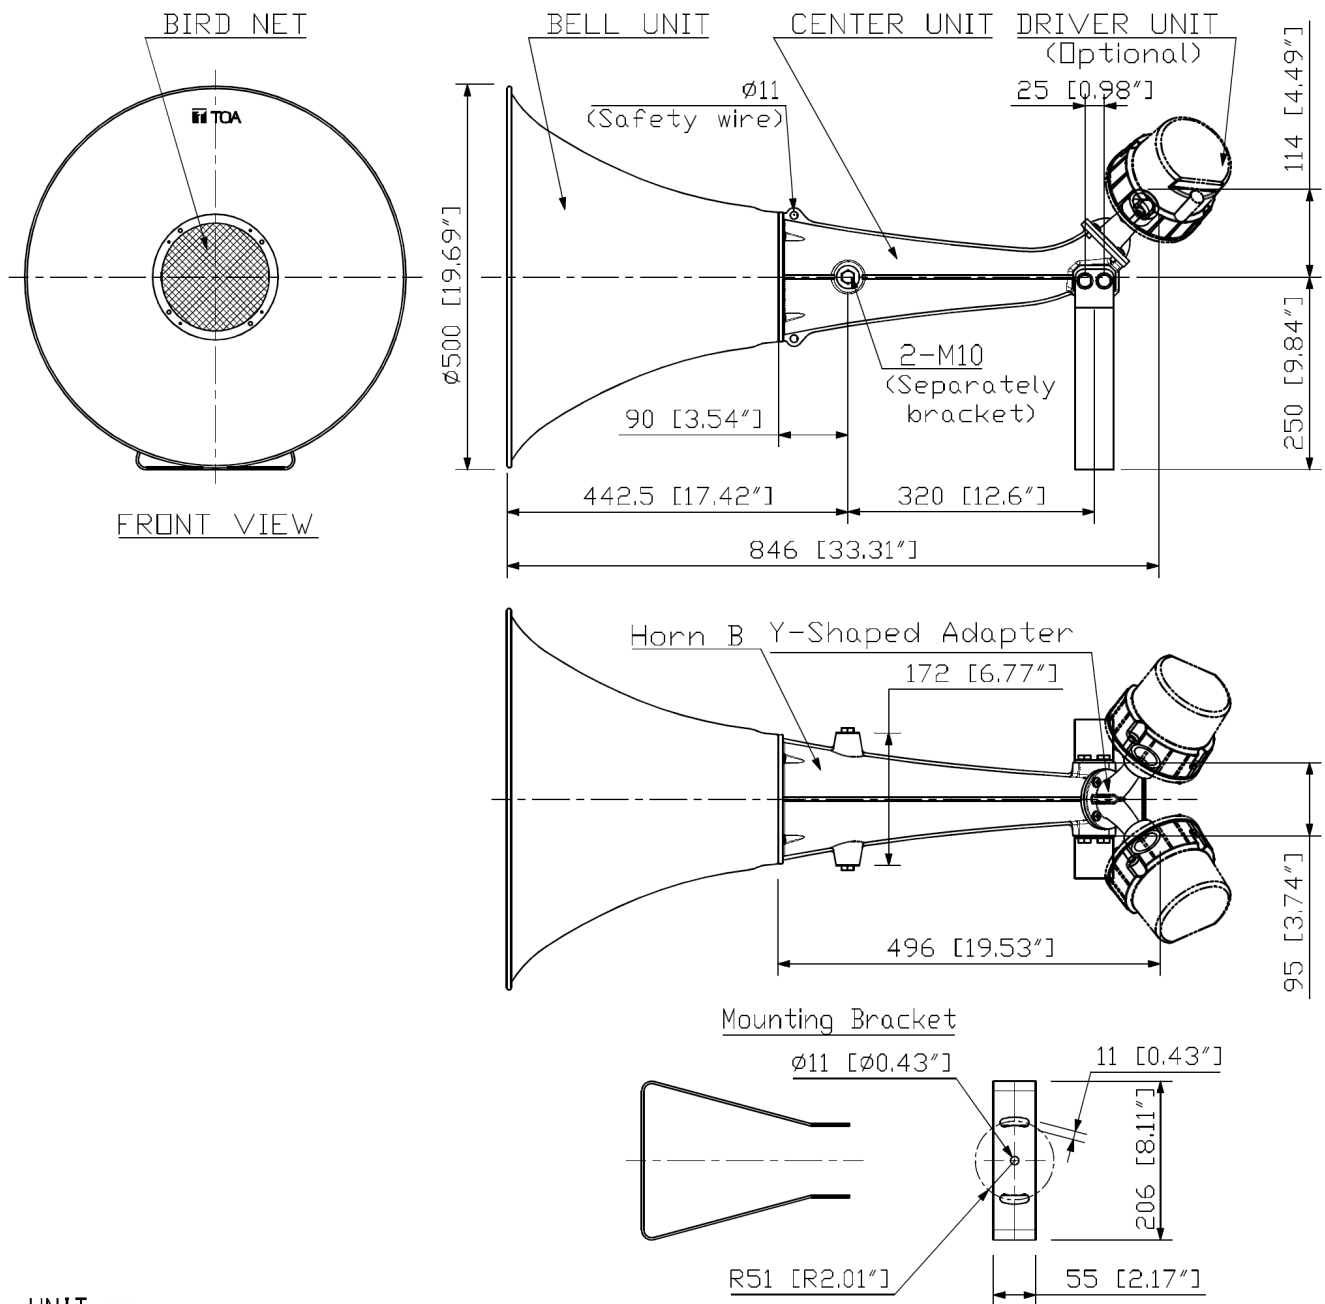

UNIT:mm