NF-2S 3CU

WINDOW INTERCOM SYSTEM



The NF-2S Window Intercom System is designed to relieve problems in understanding face-to-face conversations through a partition or face masks. It is consisting one Base Unit and two Sub-Units. The Sub-Unit is compact, lightweight and built in magnet which allows to be easily attach to both sides of partition or the like.The NF-2S features simultaneous 2-way conversion capability and noise cancellation circuitry, and also supports the use of headsets making it ideal for use in a wide range of locations. The system also provides smooth conversation with natural sound quality covering a wide voice band.

Key features

- Possible for Smooth & Natural Conversation
- Compact Design & Simple Installation
- Additional Option When Pursuing for Further Quality Improvement

Specifications


Power Source	100 - 240 V AC, 50/60 Hz (use of the supplied AC adapter)
Rated Output	1.7 W
Current Consumption	0.2 A
Signal to Noise Ratio	73 dB or more (volume: min.) 70 dB or more (volume: max.)
MIC Input	-30dB (0 dB= 1 V) (*2) Ø3.5mm mini jack (4P), phantom power supply
Speaker Output	16 Ω Ø3.5 mm mini jack (4P)
Control Input	External mute input: No-voltage make contact inputs, open voltage: 9 V DC or less, short-circuit current: 5 mA or less, push-in terminal block (2 pins)
Indicators	Power Indicator LED, Signal indicator LED
Operating Temperature	0 °C to + 40 °C (32 °F to 104 °F)
Operating Humidity	85 %RH or less (no condensation)
Finish	Base Unit:Case: ABS resin, white, paint Panel: ABS resin, black paint Sub-Unit: ABS resin, white, paint
Dimensions	Base Unit: 127 (W) × 30 (H) × 137 (D) mm (5" × 1.18" × 5.39") Sub Unit: 60 (W) × 60 (H) × 22.5 (D) mm (2.36" × 2.36" × 0.89")
Weight	Base Unit: 225 g (0.5 lb)Sub-Unit:65 g (0.14 lb) (per piece)
Included Accessories	AC adapter × 1, Power cord (1.8 m (5.91 ft) × 1Dedicated cable (4 pins, 2 m (6.56 ft) × 2, Metal plate × 1,Rubber foot for Base Unit × 4, Mounting base × 4, Zip tie × 4
Optional Accessories	Expansion set: NF-CS1 5M externsion cable: YR-NF5S

(*2) 0 dB = 1 V


Dimensions

■APPEARANCE


Base Unit

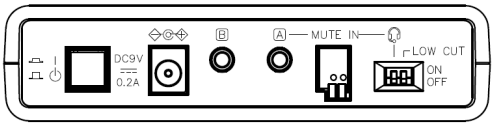

Rear View

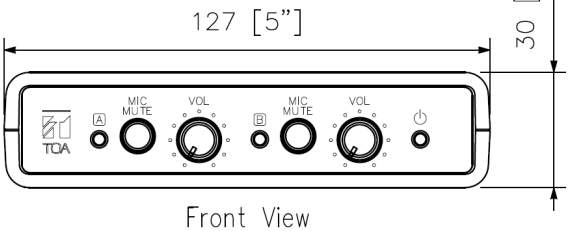


Front View

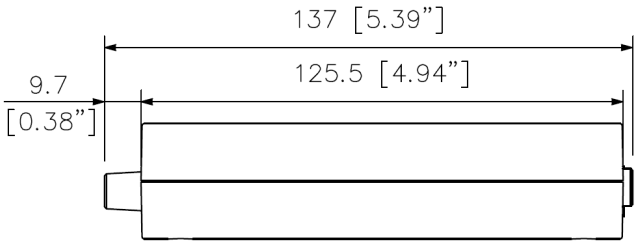


Side View

Sub-Unit




Front View

Side View



Bottom View

Dedicated cable
(Accessory)

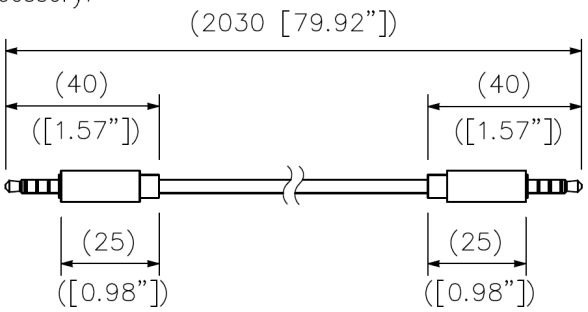

Version	1CE	3CU	4CE	5TW	6CC
AC plug	