


U-61S T

AUX PRIAMPLIFIER MODULE

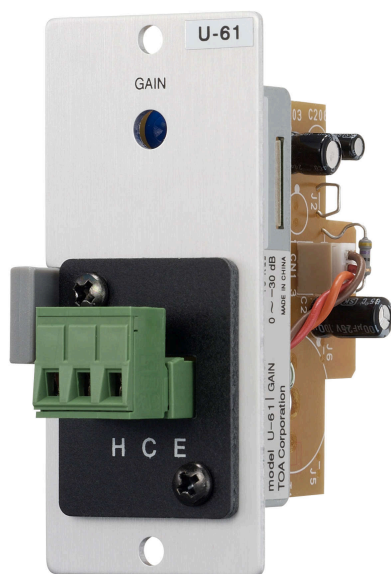

The U-61S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced line input with removable terminal block connector, compressor function and gain control.

Key features


- For unbalanced, line level sources such as tuners, cassette decks, CD players, computer sound cards, jukeboxes, mixers and satellite receivers
- For adjacent sources (less than 15ft from the host unit)
- Compressor function prevents overload and distortion
- Master compressor mode
- Connector: removable terminal block

Specifications

* 0 dB=1 V


Power Supply	24 V DC (supplied from the main frame)
Current Consumption	30 mA
Input Sensitivity	-20 dB* (rated output: -20 dB*)
Input Impedance	220 k Ω , unbalanced
Frequency Response	20 Hz - 20 kHz $\pm$ 1.0 dB
Distortion	0.05 % or less (1 kHz, output: -6 dB*)
Noise Level	-90 dB* (20 Hz - 20 kHz BPF)
Gain	-30 - 0 dB
Compressor Range	20dB (Threshold fixed input level: +2 dB*)
Connector	Terminal block (3P)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 60 g (0.13 lb)

Dimensions

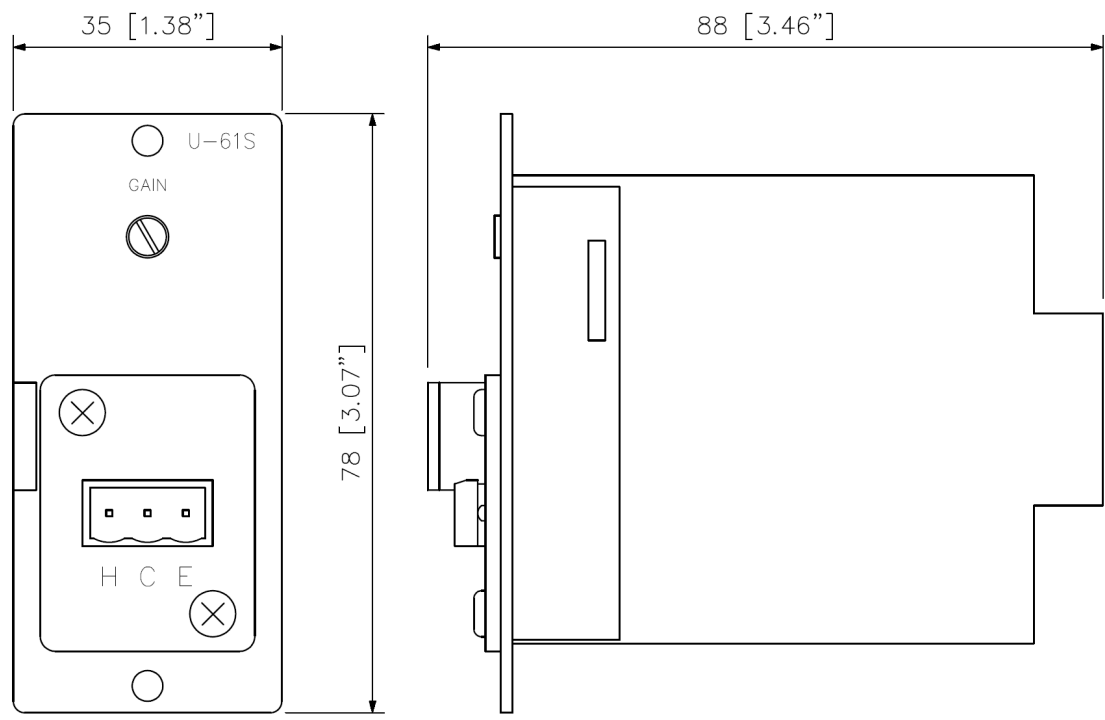

Front View

Side View

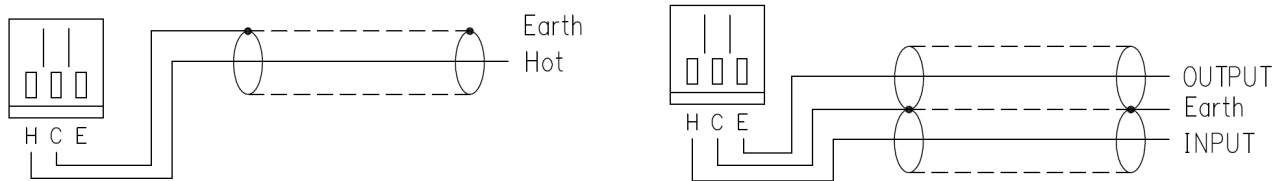

Connection Diagram

UNIT:mm