

## MP-032B

### MONITOR PANEL



The MP-032B is a monitor panel that is designed to provide aural and visual monitoring for multi-channel sound and program system.


### Key features

- Passive monitor panel for speaker line level
- Monitors up to 10 separate channels or 10 amplifiers
- Large easy-to-read watt meter for adjusting output level
- Additional audio monitoring with built-in 5" full range speaker

## Specifications

|                      |                                                                                                        |
|----------------------|--------------------------------------------------------------------------------------------------------|
| Functions            | Aural/visual monitoring (up to 10 power amplifiers)                                                    |
| Input                | 25 V (625 $\Omega$ ), 50 V (2.5 k $\Omega$ ), 70 V (5 k $\Omega$ ), 100 V (10 k $\Omega$ ), switchable |
| Monitor Speaker      | Full-range 12 cm speaker                                                                               |
| Control              | Channel selector switch<br>Monitor volume control<br>Watt meter<br>Line voltage selector switch        |
| Terminal             | M4 screw terminals, distance between barriers: 8.8 mm                                                  |
| Finish               | Surface-treated steel plate, black                                                                     |
| Dimensions           | 483(W) x 133(H) x 87(D) mm                                                                             |
| Weight               | 2.2 kg                                                                                                 |
| Included Accessories | Rack mounting screw (with washer) x 4                                                                  |

## Dimensions

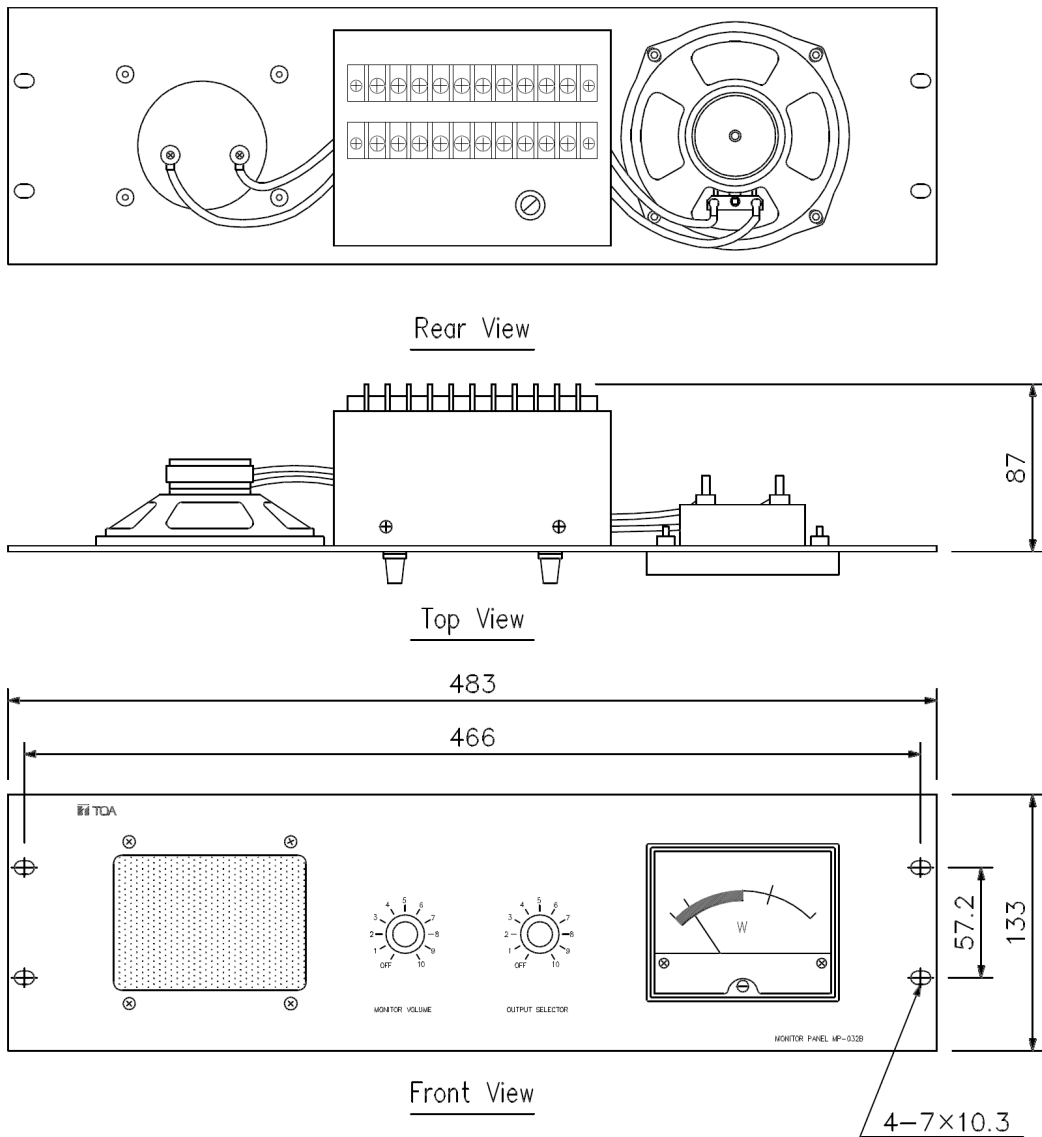

UNIT: mm

## A&E specifications

\*UNDEFINED TEXT\*