

DESCRIPTION


The PE-604WU is a pendant speaker designed for the installations suspended from a ceiling. A directly-attached 5 m (16.4 ft) hanging wire allows the speaker to be suspended from high ceilings. The PE-604WU is driven on both high-impedance (100 V, 70 V and 25 V) and low-impedance (8 Ω) lines. The input power (impedance) can be easily changed at the upper side of the speaker. The PE-604WU is certified to UL 1480 UUMW and ULC-S541 standards. Using the supplied GRIPPLE® hangers will facilitate the speaker mounting height adjustment.

SPECIFICATIONS

Enclosure	Bass-reflex type
Rated Input	60 W (100 V, 70 V line, 8 Ω), 7.5 W (25 V line)
Rated Impedance	100 V line: 170 Ω (60 W), 330 Ω (30 W), 670 Ω (15 W), 3.3 kΩ (3 W) 70 V line: 83 Ω (60 W), 170 Ω (30 W), 330 Ω (15 W), 670 Ω (7.5 W), 3.3 kΩ (1.5 W) 25 V line: 83 Ω (7.5 W), 170 Ω (3.7 W), 330 Ω (1.9 W), 670 Ω (0.9 W), 3.3 kΩ (0.2 W) Low impedance: 8 Ω
Sensitivity	90 dB (1 W, 1 m) (330 Hz – 3.3 kHz, pink noise)
Frequency Response	110 Hz – 20 kHz (–10 dB)
Speaker Component	12 cm (5") cone-type + balanced dome-tweeter (coaxial)
UL Code	UL 1480 UUMW, ULC-S541
Operating Temperature	–10 °C to +50 °C (14 °F to 122 °F)
Finish	Enclosure: ABS resin, white (RAL 9010 equivalent) Grille: Surface-treated steel plate mesh, white (RAL 9010 equivalent), paint
Dimensions	∅186 × 275 (H) mm (∅7.32" × 10.83") (unit only)
Weight	2.9 kg (6.39 lb) (unit only)
Accessory	GRIPPLE® No.1 ×1, GRIPPLE® No.2 ×1, Release key (for GRIPPLE®)×1, Safety wire (∅1.5 mm (∅0.06")) ×1, Hanging wire (∅2 mm (∅0.08")) ×1, Speaker Cable (4-core FPL listed cable 4.6 m (15.09 ft)) ×1 ※ GRIPPLE® No.1 and No.2 are hangers for suspending the speaker.

APPEARANCE

※ GRIPPLE® is a registered trademark of Gripple Limited, England.

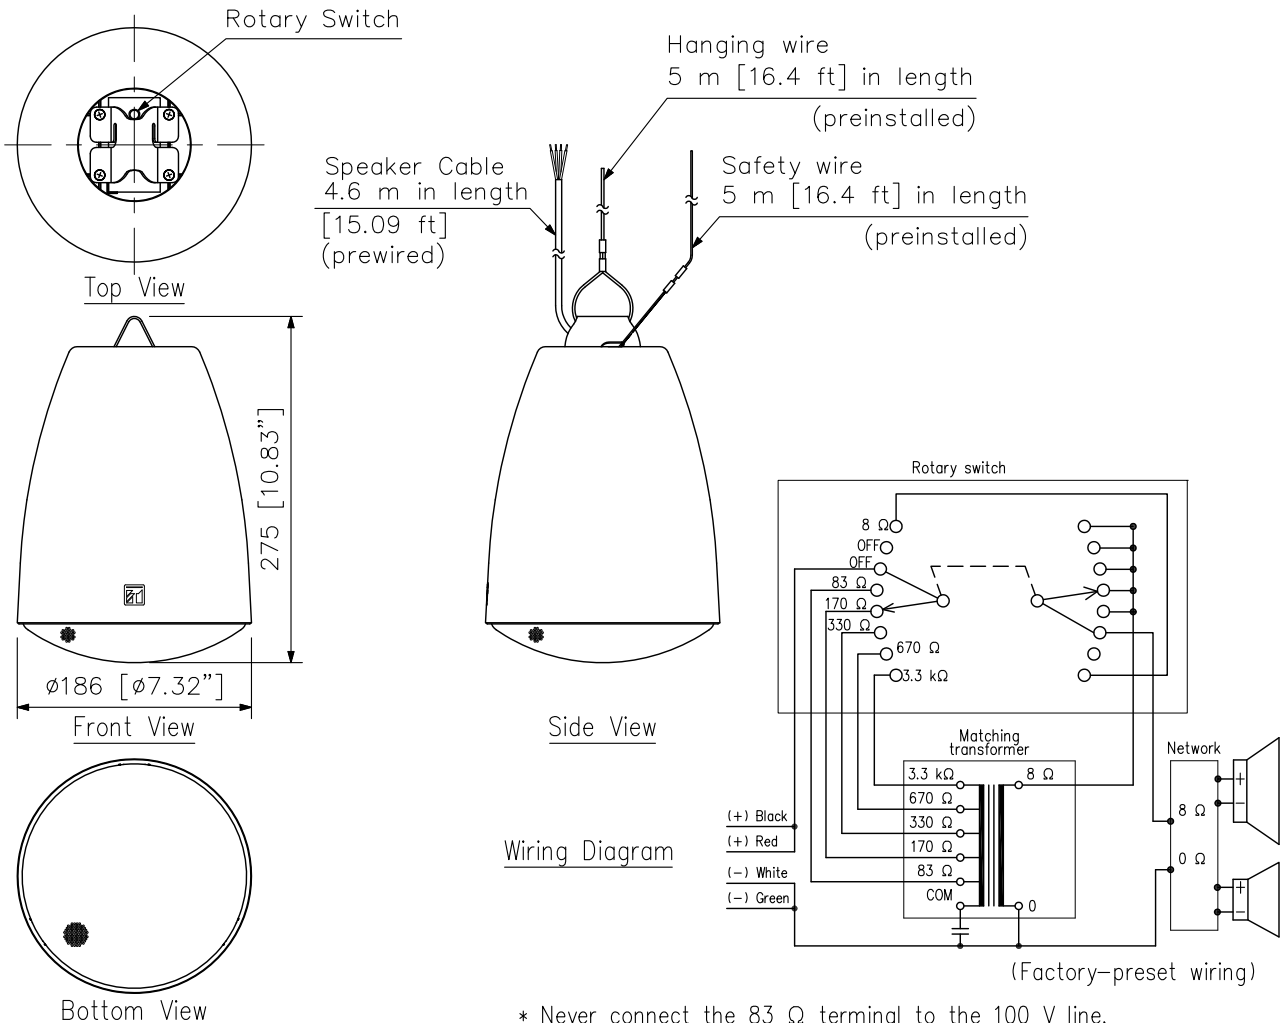

* Never connect the 83 Ω terminal to the 100 V line.
* Never connect the 8 Ω terminal to the 100 V or 70 V or 25 V line.